



# SPEZIAL ANGLE FRAME 25

## Stainless Steel

We recommend using the SPEZIAL angle frame for the installation of all Top Clean matting systems to ensure optimum fixation and easy release for cleaning purposes. Frame, corner connections and screws are made of one material, high quality stainless steel, to prevent corrosion. Frames are mitre-cut and ready for screw connection.



-  For use indoors or in covered outdoor areas
-  For outdoor use

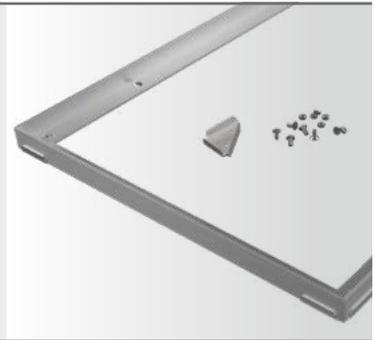

- |          |                                     |          |   |          |   |
|----------|-------------------------------------|----------|---|----------|---|
| <b>1</b> | Zone 1: Coarse Dirt Collecting Area | <b>2</b> | Zone 2: Intermediate Zone for heavily frequented Entrance | <b>3</b> | Zone 3: Fine Dirt and Damp Dirt Collecting Area |
|----------|-------------------------------------|----------|---|----------|---|

### TECHNICAL DATA

<b>Material</b>	Angle profiles made of cold-rolled stainless steel (with rounded edges)
<b>Application</b>	Suitable for Top Clean mats 22 mm
<b>Height</b>	25 x 20 x 3 mm
<b>Weight / m</b>	1,1 kg



Frame with corner connector and anchor (delivered without installation)



Corner connectors and anchors are included, uninstalled when delivered



Red angle profiles provided as an installation aid for frames with over 2 m side length



#### Installation made easy!


Take a look at our 2-minute animation. Click on this link: <https://www.geggus.com/services/geggus-tv> or scan the QR code on the right.

On the next page you will also find installation instructions for angle frames.

# SPEZIAL ANGLE FRAME

## Notes and instructions for installation

- When installing SPEZIAL angle frames, please make sure that the frame is flush with the floor (see illustration). Please note that the floor surface needs to be absolutely even for the matting to sit correctly in the frame once inserted. Repair uneven surfaces if necessary prior to frame installation. Important: Provide clearance height to insert entrance mat into the frame.
- Mitred corners can be connected accurately by applying SPEZIAL corner connectors (included). Profiles of over 120 cm include floor anchors that facilitate installation.
- NOTE: For larger frames (over 2 m), red angle frames will be supplied as an installation aid. Please ensure they are inserted according to the enclosed drawing. They will guarantee there is no movement in the frame while the screed sets.
- Installing frames and mats according to the enclosed installation guide ensures that mats sit evenly in the frame. Please note that correct installation of the frame is absolutely essential as there is only a 2 mm gap between frame and mat.

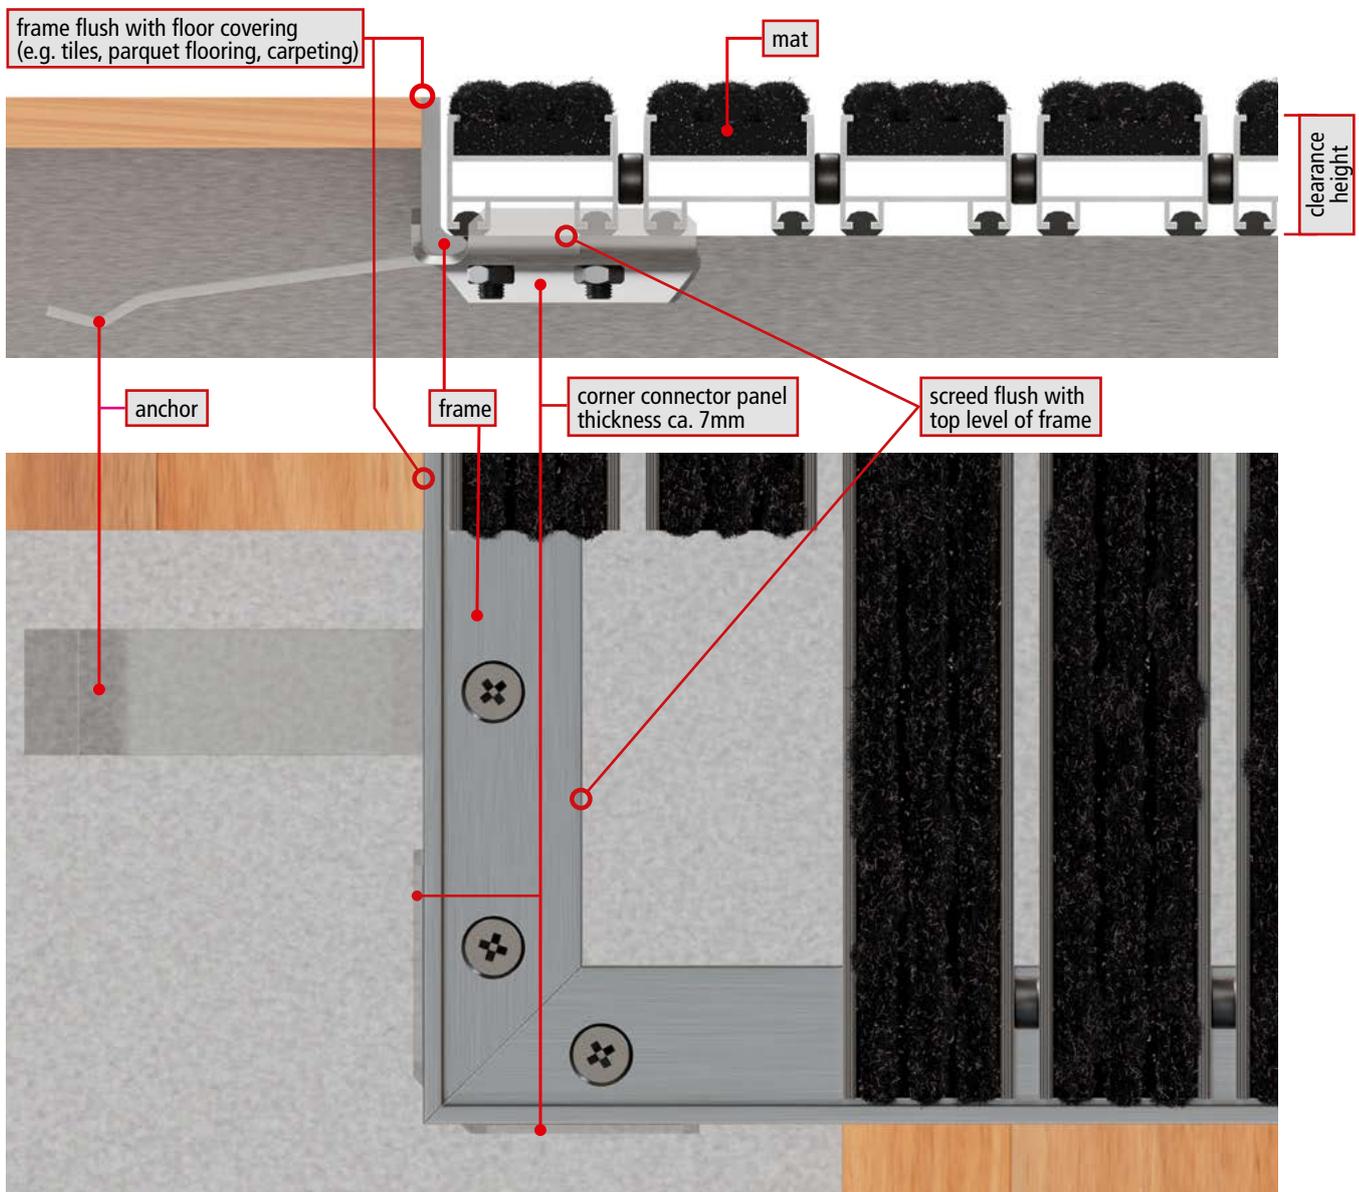

Installation made easy – Scan QR code and watch animation (2 min)  
 Or visit our website <https://www.geggus.com/services/geggus-tv>